

# UTILITY MODEL ABSTRACTS OF JAPAN

(11)Publication number: **S56-7569U**

(43)Date of publication of application: **January 22, 1981**

---

(51)Int.Cl.

B05B 13/00

A61J 3/06

B01J 2/00

B05C 3/08

---

(21)Application number: **S54-89205** (71)Applicant: **OKAWARA MFG CO LTD**

(22)Date of filing: **June 28, 1979** (72)Inventor: **TERUSHIGE HIROKI**

---

## (54) **PILL-COATING APPARATUS**

(57)Abstract:

A pill-coating apparatus is provided with a baffle 5, a lid 6 and a drum 8. The baffle 5 is a U-shaped bent thin metal whose two ends are sealed. The space within the baffle 5 is sealed by the lid 6. A bolt 7 passes through the lid 6 to install the apparatus on the drum 8 in a detachable manner.

⑬ 日本国特許庁 (JP)  
⑫ 公開実用新案公報 (U)

⑪ 実用新案出願公開

昭56-7569

⑤ Int. Cl.<sup>3</sup>  
B 05 B 13/00  
A 61 J 3/06  
B 01 J 2/00  
B 05 C 3/08

識別記号

庁内整理番号  
7005-4F  
6670-4C  
6703-4G  
6683-4F

④ 公開 昭和56年(1981)1月22日

審査請求 未請求

(全 2 頁)

⑭ 錠剤のコーティング装置

島田市船木1227-1

① 実 願 昭54-89205

⑦ 出 願 人 株式会社大川原製作所  
静岡県榛原郡吉田町神戸2147-1

② 出 願 昭54(1979)6月28日

⑧ 考 案 者 広木照茂

③ 代 理 人 弁理士 福地正次

⑮ 実用新案登録請求の範囲


薄い金属材等をU字型に析曲げ、両側端をシールしたバツフル5の内空を蓋6によつて密閉し、該蓋6を貫通してドラム8にボルト7によつて着脱自在に取付けたことを特徴とする錠剤のコーティング装置。

来の実施例を示す部分断面拡大図、第3図はバツフルの設置状態を示す部分断面図、第4図は錠剤のコーティングを行う過程を示す説明図である。


1 : 回転ドラム、2 : 取付金具、3 : バツフル、  
4 : ボルト、5 : バツフル、6 : 蓋、7 : ボルト、  
8 : ドラム、9 : スプレーノズル、10 : 錠剤。

図面の簡単な説明


第1図は本考案の部分断面拡大図、第2図は従

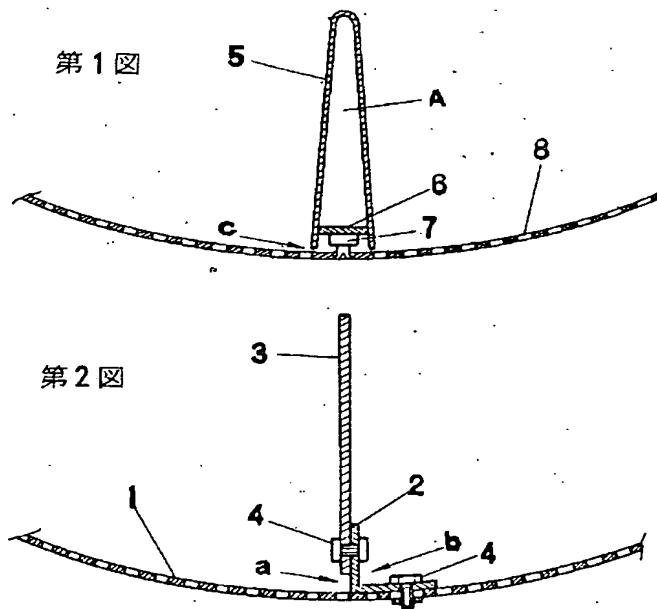

第 3 図

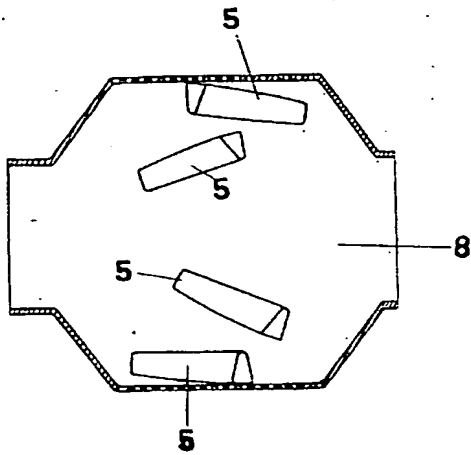

第 4 図

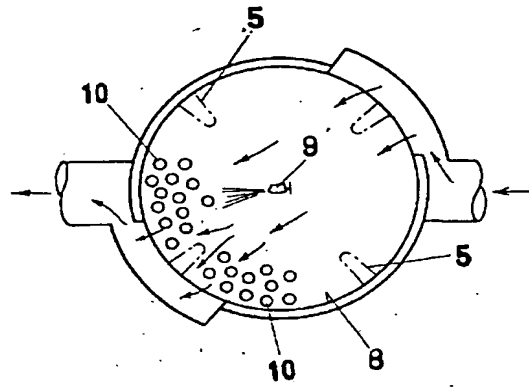

BEST AVAILABLE COPY